



50Hz Standby 34KVA

DHY34KE
DHY34KSE

Diesel Generator



HYUNDAI
POWER PRODUCTS

All Days | Safty | Reliable | Stability



TECHNICAL SPECIFICATION

DHY34KE OPEN TYPE / DHY34KSE CANOPY TYPE

50Hz
Standby 34KVA

Benefits and Feature

- > Use Chinese best quality vehicle engine, low fuel consumption, running reliable
- > HYUNDAI high quality and performance brushless alternator, with AVR
- > High quality controller of COMAP iL-NT MRS10
- > Block design electrical control system, easy operate and maintenance
- > Standard 8 hours generator running base frame fuel tank (100% load)
- > With baseframe forklift hole and generator canopy lifting hole
- > Industrial waterproof canopy, ensure generator all days running
- > Industrial silencer (7 meters the noise is lower than 70 dB)
- > Easy operation, IP66 protection industrial sockets and plugs
- > Four pole circuit breaker with RCD earth protection
- > Standard ATS function connector

Technical Specification

Prime Power	KVA / KW	31 / 25
Standby Power	KVA / KW	34 / 28
Power Factor		0.8
Frequency	Hz	50
Rate Voltage	V	400/230
Rate Current	A	45.2
Controller		MRS10
Control Voltage	DC / V	12
Battery Capacity	Ah	60
Coolant Capacity	L	10.2
Fuel Tank Capacity(Base frame)	L	93
Fuel Consumption	L / hour	9.5
Running Time	Hour	10

Voltage

Steady state regulation	%	± 0.5
Dynamic voltage renewal	%	+20~ - 15
Stable time	Sec	2.0
Waveform distortion	%	3
Volatility	%	0.5

Frequency

Steady state regulation	%	± 1
Dynamic frequency renewal	%	+10~ - 7
Stable time	Sec	3
Volatility	%	0.5

Environment require

Temperature	C	40
Humidity	%	60
Altitude	m	1000

Standard

ISO3046、ISO8528

Dimension | Weight | Sound



DHY34KE OPEN TYPE

Length	mm	1810
Width (W)	mm	950
Height (H)	mm	1020
Weight net	Kg	690
loading capacity (units/container)		
Sound @7 meter	dB	



DHY34KSE CANOPY TYPE

Length	mm	2200
Width (W)	mm	950
Height (H)	mm	1230
Weight net	Kg	1000
loading capacity (units/container)		
Sound @7 meter	dB	

Note

1. Generator continuous running at variable load for unlimited periods with 10% overload available for 1 hour in any 12 hours period
2. Every generator strictly test on 0%、25%、75%、100%、110% load、dynamic of the responsiveness ability, and all protections

DIESEL ENGINE



Powerful engine and reliable running quality
Durable running performance and was proofed by vehicle's application

Compact structure
Compact structure and metal materials saving for low cost

Low maintenance and repair cost
Air,fuel and oil tubes are silicone and stainless steel materials, which reduce leakage problems substantially

Excellent start performance
Fuel injector and pump were tested fully in Various environments,which provide excellent start and running preformance

Model	HY4102	
Prime power	Kw	33
Structure	4 cylinder,inline	
Fuel type	Diesel	
Fuel consumption	L/Hour	9.3
Lubricant consumption	L/Hour	0.0475
Governor	Mechanical	
Cooling	Water	
Lubricant capacity	L	7.5
Air intake flow	m³/s	2.1
Exhaust gas flow	m³/s	6.3
Exhaust gas temperature	400	
Exhaust gas back pressure	KPa	5
Compression ratio	18	
Aspiration	Natural	
Bore	mm	102
Stroke	105	
Displacement	L	3.8
SAE	3/10.0	
Dimension	mm	865 × 582 × 808
Net weight	Kg	290

ALTERNATOR

Model	184G	
Prime power	kVA	31
Structure	1 bearing	
Excitation mode	Self - excitation	
Insulation class	H	
Protection class	IP23	
TIF	<50	
THF	<2%	
Air flow	m³/s	0.095
AVR Model	SX460	



Best structure
Excellent design ensures compact structure and perfect appearance

Excellent performance
Excitation enhanced system improves start and short circuit's protection performance

Economy
Less parts involved and the most market's demand lead to cheap price and fine quality

Easy maintenance and repair
Core parts won't be involved in repair job,AVR can be replaced easily,examining diode doesn't disassemble rotor.

CONTROL PANEL


Controller

Comap MRS10



Support engine and alternator monitoring, measurement and protection. This is long - running and back - up unit to integrate the best way to control. support Modbus standard, modem, RS232, RS485, USB and internet.

Control panel

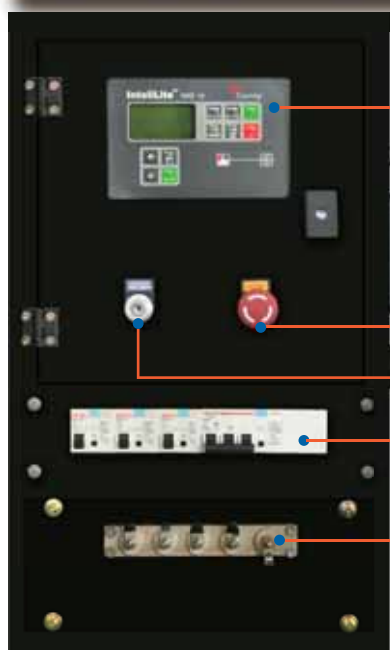

Comap MRS10

ATS connector

24 pin
Heavy duty connector

Emergency stop button

Power switch

1x3 phase circuit breaker
3xsingle phase circuit breaker

Wire connect terminal
U.V.W.N.PE



Single phase socket

Measurement, displayment MRS10

Genset prime power Kw	
Power factor	
engine speed	
Phase to neutral voltage	
Phase to phase voltage	
Genset frequency	
Genset current	
Mains Phase to neutral voltage	×
Mains Phase to phase voltage	×
Mains frequency	×
engine oil pressure	
engine water temperature	
fuel level	
battery voltage	
genset power KVA	
Genset running time	
Genset output KWh	×
History file	×

Alarm, shutdown function


Low oil pressure warning, shutdown	
High water temperature warning, shutdown	
Engine over and under speed shutdown	
Low fuel level warning, shutdown	
battery low and high voltage warning	
battery charging failure	
Genset low and high voltage warning, shut down	
Alternator 3 phase voltage unbalance shut down	
Alternator low and high frequency warning, shut down	
Genset over load shutdown	
Alternator 3 phase current unbalance shutdown	
Mains low and high voltage warning	×
Mains low and high frequency warning	×

Optional

Remote start and stop	
RS232 card	
USB card	
RS485 card	
Multi language display	
GPRS communication	
GPS communication	×

standard optional × None

ACCESSORIES

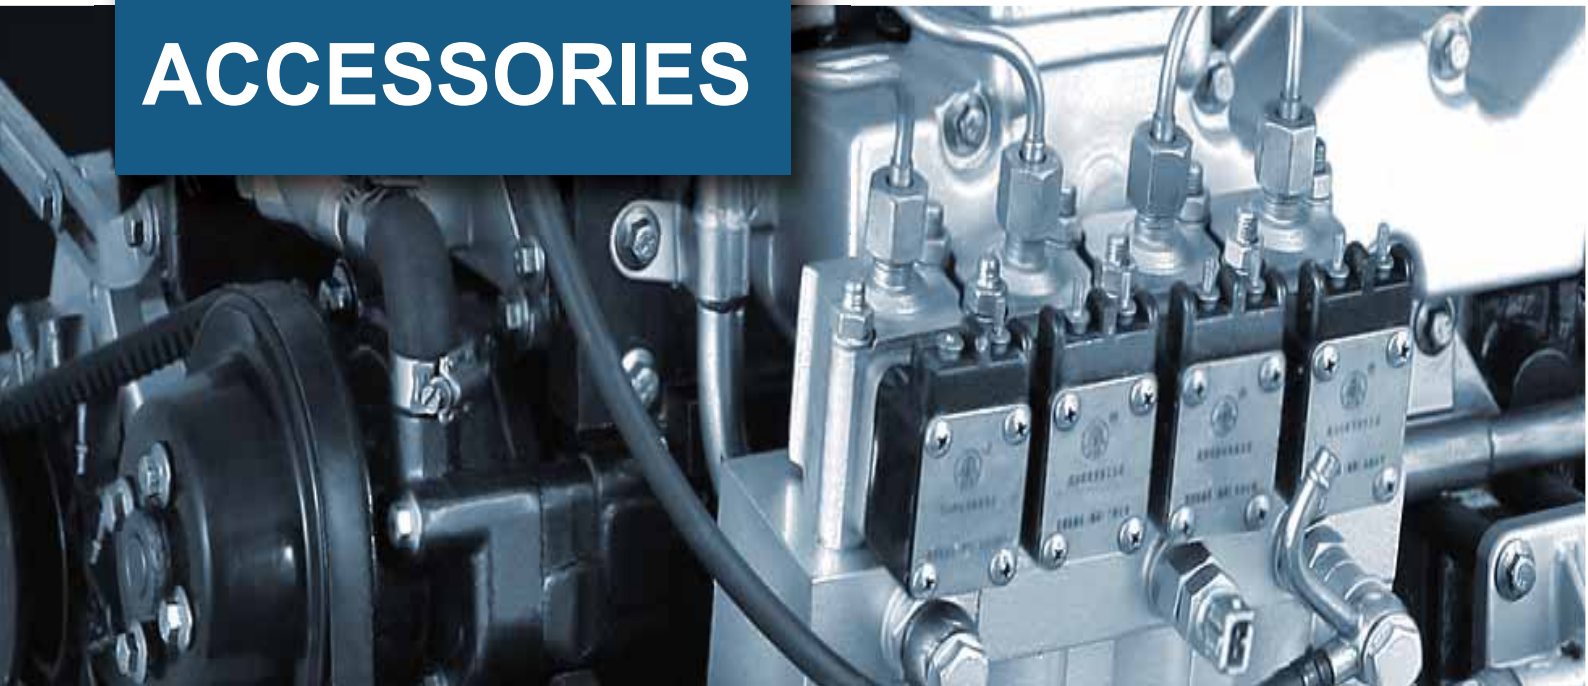

Exhaust system



Residential muffler

Exhaust gas pipe

preheating system



Water preheater

Oil preheater

alternator Anti - condensation heater

Fuel system



Auto filling fuel pump

Manual filling fuel pump

500L base frame fuel tank

1000L base frame fuel tank

500L external fuel tank

1000L external fuel tank

electrical system



AMF20 controller

IC - NT
synchronizing
controller

wireless remote starter

Maintenance spare parts



500 hours genset spare parts

1000 hours genset spare parts