

SBFT12-180(12V180Ah)

SKANBATT

Specification

Cells Per Unit	6
Voltage Per Unit	12V
Nominal Capacity	180Ah@10hour-rate to 1.80V per cell @25°C
Weight	Approx. 52.0 Kg (Tolerance ±5.0%)
Internal Resistance	≤4.0 mΩ (Full Charge Condition @25°C)
Terminal	Default F14(M8)
Max. Discharge Current	1800A (5 sec)
Design Life	12 years
Max. Charging Current	54.0 A
Reference Capacity	C ₃ 135.0Ah C ₅ 153.0Ah C ₁₀ 180.0Ah C ₂₀ 188.8Ah
Float Charging Voltage	13.5 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C ±5°C
Self Discharge	Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



SKANBATT SBFT(Front Terminal) Series is specially designed for telecom use with 12 years design life in float service. By adopting a new AGM separator and centralized venting system, the battery can be installed in any position while maintaining high reliability. The dimensions of the SBFT series are designed for 19" and 23" cabinet in stallation. It is suitable for telecom EPS/EPS, applications.



ISO 9001






ISO 14001



ISO 45001



Dimensions



F14 Terminal

Length	560±2mm (22.1 inches)
Width	125±2mm (4.92 inches)
Height	316±2mm (12.4 inches)
Total Height	316±2mm (12.4 inches)
Terminal	Value
M5	9~10 N*m
M6	11~12 N*m
M8	14~15 N*m

Unit: mm

Constant Current Discharge Characteristics : A (25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	310.6	193.2	110.0	65.5	50.8	39.9	34.0	22.8	19.0	9.93
1.65V	296.9	185.5	106.2	63.4	49.2	38.8	33.1	22.6	18.8	9.78
1.70V	278.1	177.3	102.8	61.3	47.9	37.8	32.2	22.2	18.5	9.66
1.75V	258.8	169.4	99.0	59.2	46.4	36.8	31.4	21.9	18.2	9.54
1.80V	239.0	161.9	95.2	57.1	45.0	35.7	30.6	21.5	18.0	9.44
1.85V	198.3	139.5	85.4	52.3	41.6	33.2	28.5	20.2	16.9	8.97

Constant Power Discharge Characteristics : W/Cell (25°C)


F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	543.0	350.9	206.7	124.2	97.0	76.6	65.5	44.6	37.3	19.6
1.65V	526.8	340.4	200.7	120.8	94.4	74.8	64.0	44.2	36.9	19.3
1.70V	500.8	328.6	195.4	117.5	92.2	73.1	62.6	43.6	36.4	19.1
1.75V	472.8	317.3	189.4	113.9	89.8	71.5	61.2	43.1	36.0	18.9
1.80V	442.7	306.3	183.2	110.4	87.4	69.6	59.8	42.4	35.6	18.7
1.85V	372.6	266.5	165.3	101.7	81.2	65.0	56.0	39.9	33.5	17.8

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.
The battery must be fully charged before the capacity test. The C₁₀ should reach 95% after the first cycle and 100% after the third cycle.


SBFT12-180(12V180Ah)

SKANBATT


Discharge Characteristics Curve

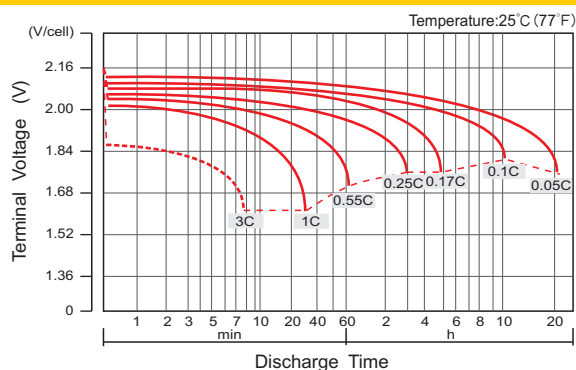


Charge Characteristic Curve For Standby Use(IU)

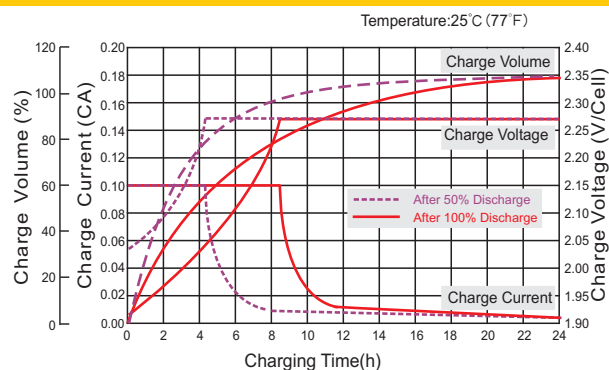


Cycle Life In Relation To Depth Of Discharge

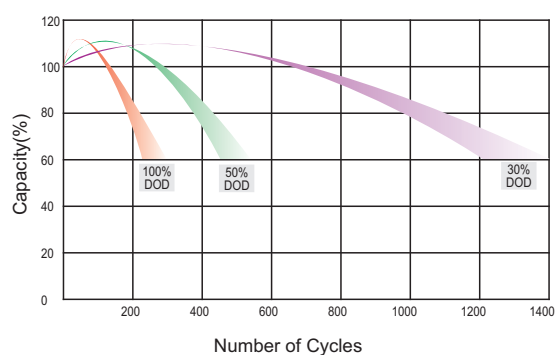


Relationship Between Charging Voltage And Temperature

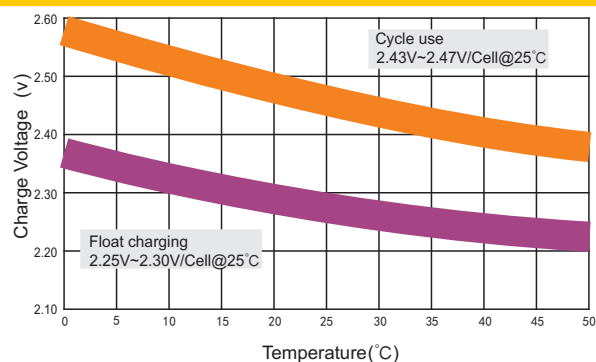


Temperature Effects On Capacity

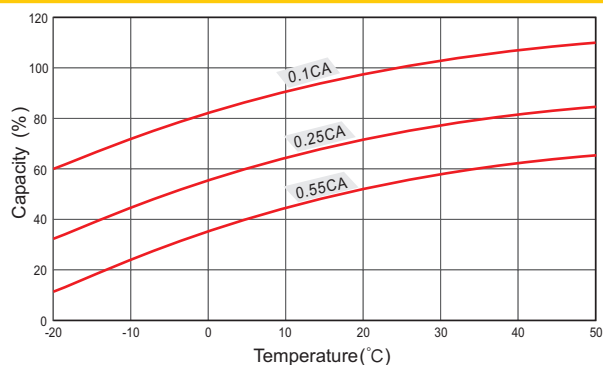


Storage Characteristics

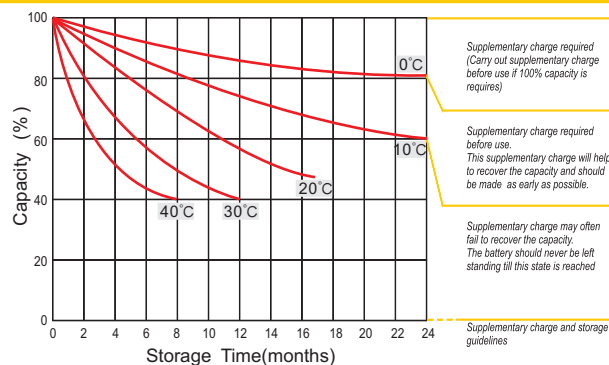

Effect Of Temperature On Long Term Life

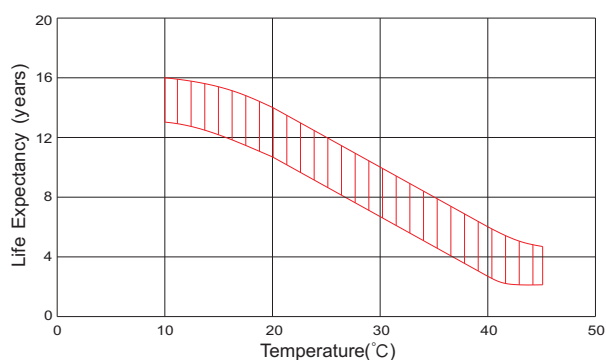

Life Characteristics Of Standby Use

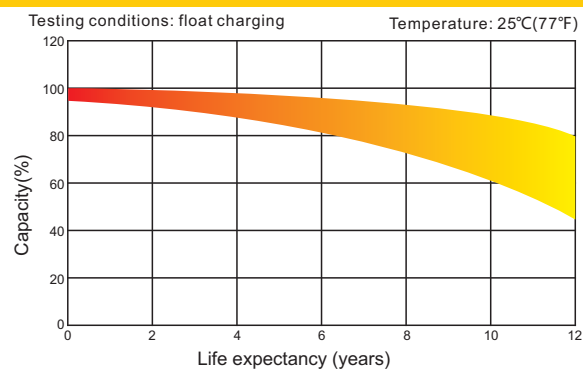

(Note) All above information shall be changed without prior notice, reserves the right to explain and update the latest information.

Skandinavisk Batteriimport Norge AS, Mjåvannsåsen 4628
Kristiansand Norway, [www.skanbatt.no post@skanbatt.no](mailto:post@skanbatt.no)