
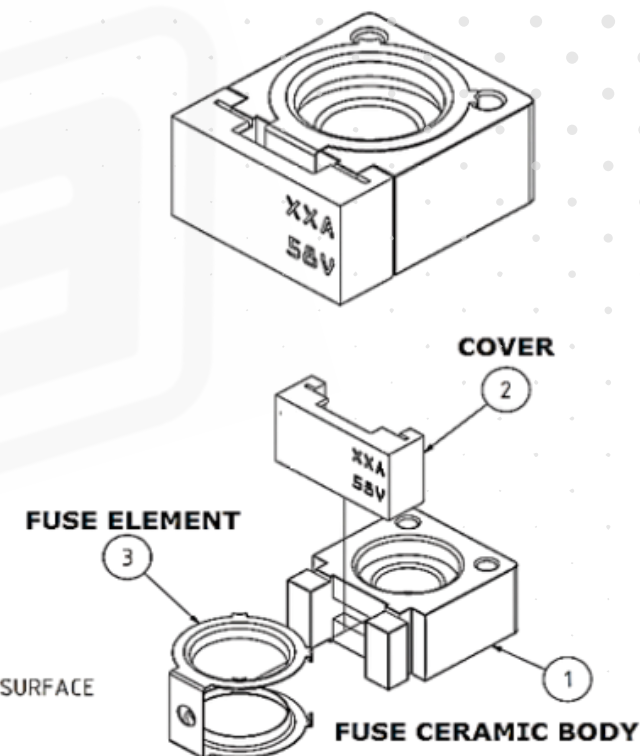


Datasheet **BATTERY TERMINAL FUSE**

Voltage: **58V DC**

Material: **ceramic body**

ITEM NO.	AMP	MAX. FUSE-LINK VOLTAGE DROP (mV)
CF050	50A	110
CF075	75A	105
CF100	100A	100
CF125	125A	95
CF150	150A	90
CF175	175A	85
CF200	200A	80
CF250	250A	75
CF300	300A	70

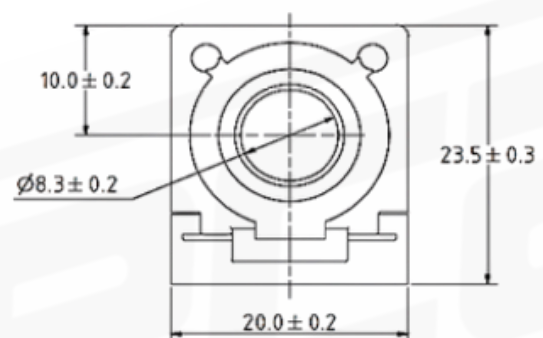

Electrical Characteristics Test According to ISO 8820-6: 2004

TEST CURRENT (A)	OPERATING TIME	
	Minimum	Minimum
1.0I _n	360,000secs	-
1.35I _n	5secs	1800sec
1.5I _n	1 sec	600sec
2.0I _n	0.2sec	60sec
3.5I _n	0.03sec	1.0sec
6.0I _n (30~150A)	0.01sec	0.2sec

*The fuses of 175A-300A aren't tested for 6I_n