

SBHR12-240W(12V240W) SKANBATT

Specification

Cells Per Unit	6
Voltage Per Unit	12V
Capacity	240W@15min-rate to 1.67V per cell @25°C
Weight	Approx. 19.5Kg (Tolerance±5%)
Internal Resistance	≤6.5 mΩ (Full Charge Condition @25°C)
Terminal	Default F11(M6)
Max. Discharge Current	650A (5 sec)
Short Circuit Current	1650A
Design Life	15 years
Max. Charging Current	19.5 A
Reference Capacity	C ₁₀ 61.3Ah C ₂₀ 65.0Ah
Standby Use Voltage	13.50 V~13.62 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Equalization Voltage	14.10 V~14.40 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



SKANBATT SEHR (High Rate) series Valve Regulated Lead Acid (VRLA) battery is designed for heavy load discharge applications with 8 years design life in float service. By using strong grids, thick plate and specially designed active material. It is with lower I.R, lower self discharge rate, high power, and longer service life. The SBHR series battery offers 30% more power output than the standard series. It is suitable for high power standby used, such as datacenter, UPS, EPS etc.



ISO 9001




ISO 14001



ISO 45001



Dimensions

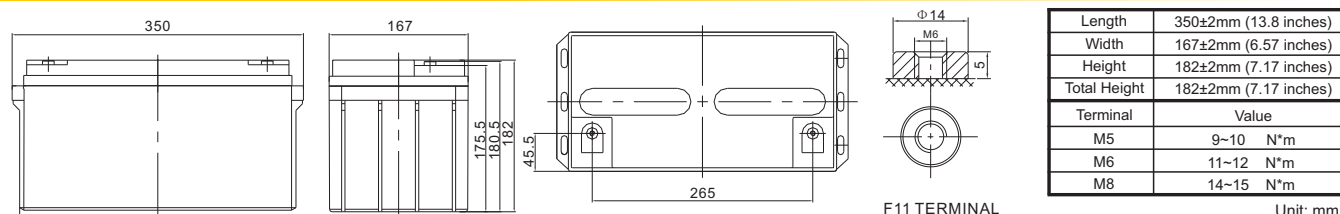

Constant Current Discharge Characteristics : A (25 °C)

F.V/Time	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	239.8	198.6	174.0	132.7	108.1	79.66	46.10	33.09
1.67V	217.6	182.1	160.8	123.8	101.6	75.38	43.98	31.74
1.70V	208.4	175.0	155.0	120.0	98.74	73.57	43.10	31.12
1.75V	192.4	163.0	145.3	113.5	93.81	70.45	41.60	30.14
1.80V	176.3	151.0	135.6	107.4	89.39	67.47	40.11	29.16
1.85V	151.3	128.6	114.9	92.38	77.59	59.68	36.23	26.59


Constant Power Discharge Characteristics : W/Cell (25°C)

F.V/Time	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	440.7	369.8	327.2	253.0	207.7	154.8	86.58	62.62
1.67V	410.2	346.9	308.8	240.0	198.3	148.4	83.33	60.53
1.70V	396.7	336.5	300.2	234.4	194.0	145.4	81.96	59.68
1.75V	372.3	318.0	285.1	224.3	186.2	140.6	79.71	58.08
1.80V	346.5	298.5	269.2	214.3	179.2	135.7	77.34	56.49
1.85V	301.8	257.8	231.2	186.3	157.0	121.1	70.34	51.96


(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

SBHR12-240W(12V240W) SKANBATT


Discharge Characteristics Curve

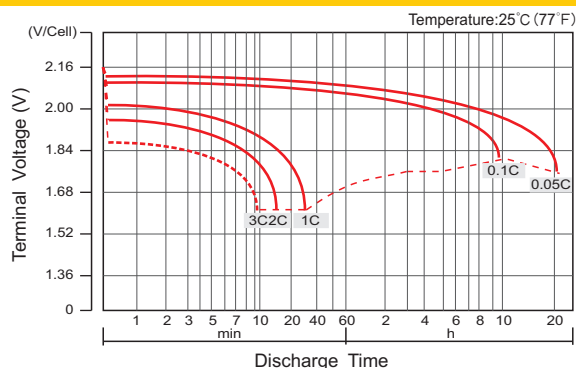


Charge Characteristic Curve For Standby Use(IU)

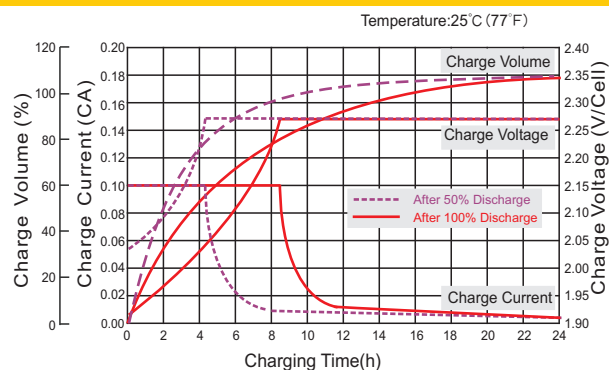


Cycle Life In Relation To Depth Of Discharge

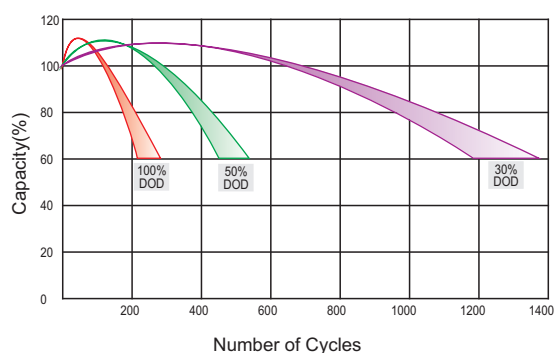


Relationship Between Charging Voltage And Temperature

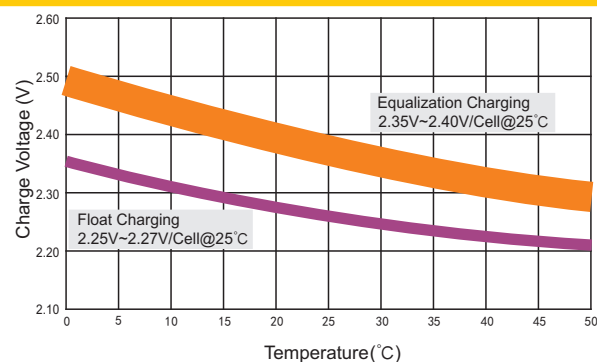


Relationship of OCV And State of Charge(20°C)

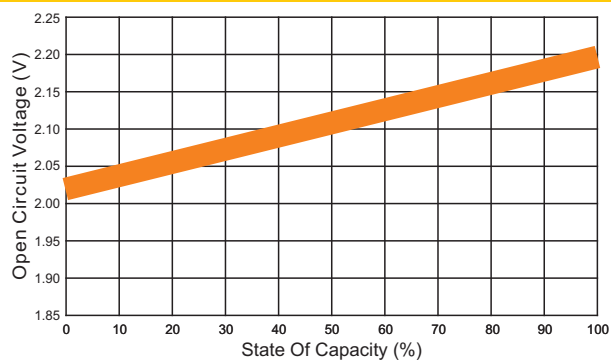


Storage Characteristics

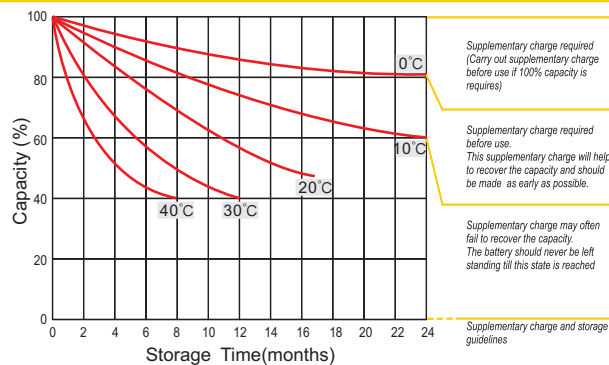

Effect Of Temperature On Long Term Life

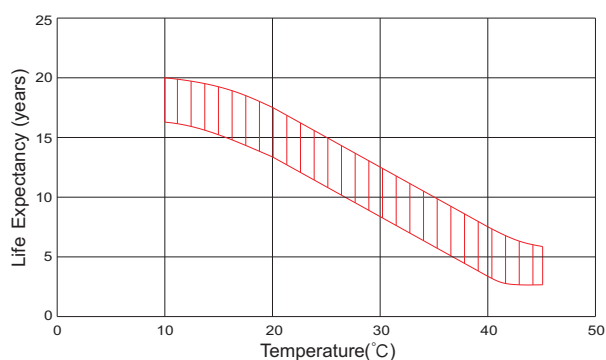

Life Characteristics Of Standby Use

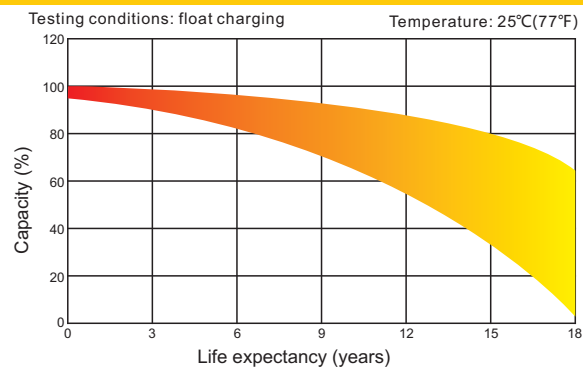

(Note) All above information shall be changed without prior notice, reserves the right to explain and update the latest information.

Skandinavisk Batteriimport Norge AS, Mjåvannsåsen 4628
Kristiansand Norway, www.skanbatt.no post@skanbatt.no